


OPzV12-100


12V100Ah




Effect of temperature on long term float life

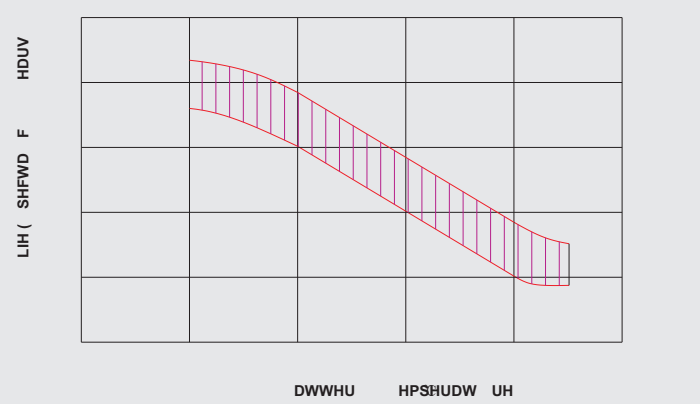


Life characteristics of cyclic use

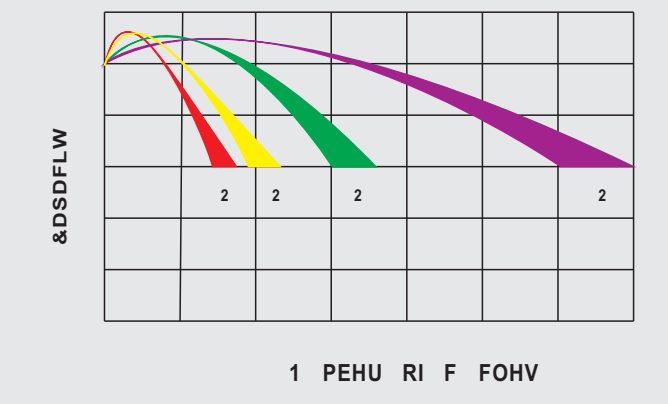

Charge characteristic Curve for cyclic use

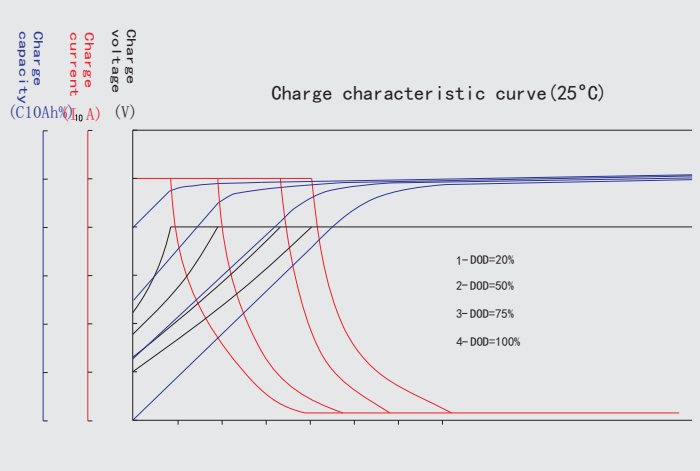

Discharge characteristic Curve

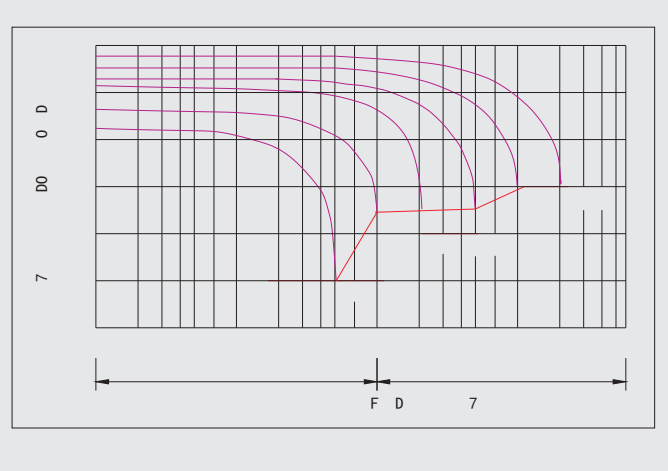

	()	()	()	()	()	()
	()					

--	--	--	--	--	--	--	--	--	--	--	--	--	--

Discharge Current VS. Final Voltage

	()	()
\leq		1.90
0.1 10 <	\leq 10	1.85
<	\leq	1.80
<	\leq	1.75
<	\leq	1.70
>		1.60

Charge the batteries at least once every one year, if they are stored at 25°C.

& DU L 0HW R

	&	a	0D
&R VWD W &	UUH W		

Maintenance & Cautions

)
※ (
※ (
(
※ (
※ & UUH W &